


SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
315/80R22.5	156/152L	20PR(LRJ)	4,000	3,550	L – 120 Km/H	120	1095	319	21.5	278	9.00

Recommended


Allowed

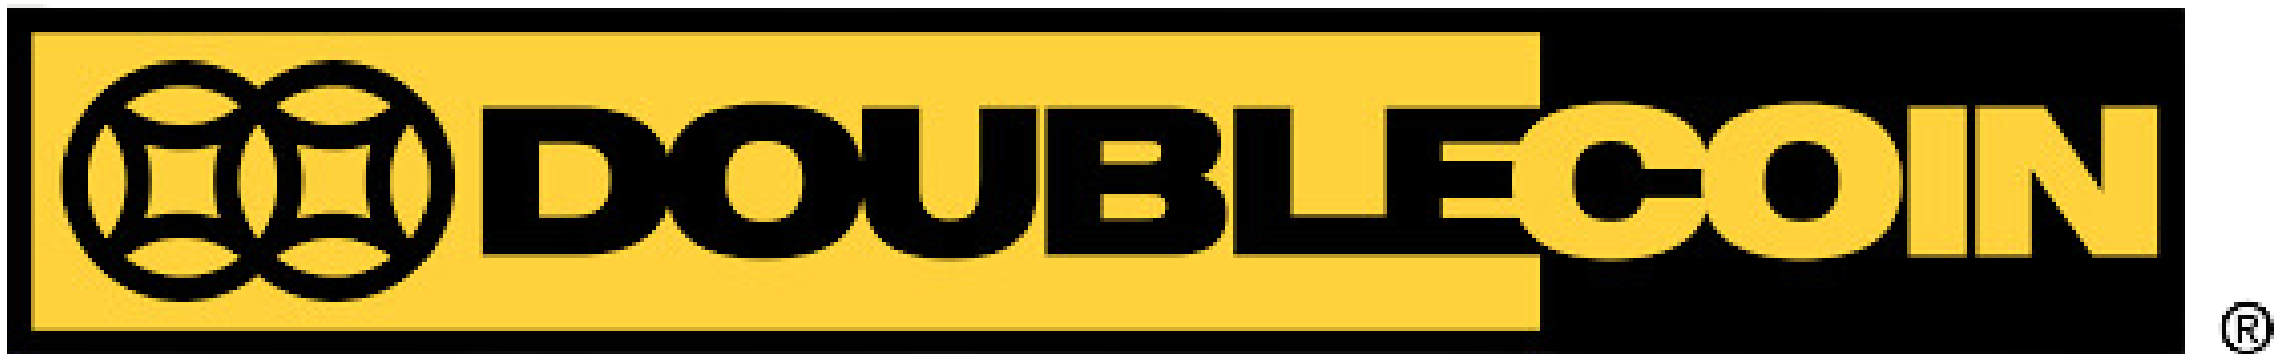

RLB468

Drive Axle


- Better Performance: Wider grooves for stability.
- Longer Life: Prevents irregular wear.
- Durable: Wear-resistant tread.
- Cooler & Stronger: Open shoulder for heat dissipation.

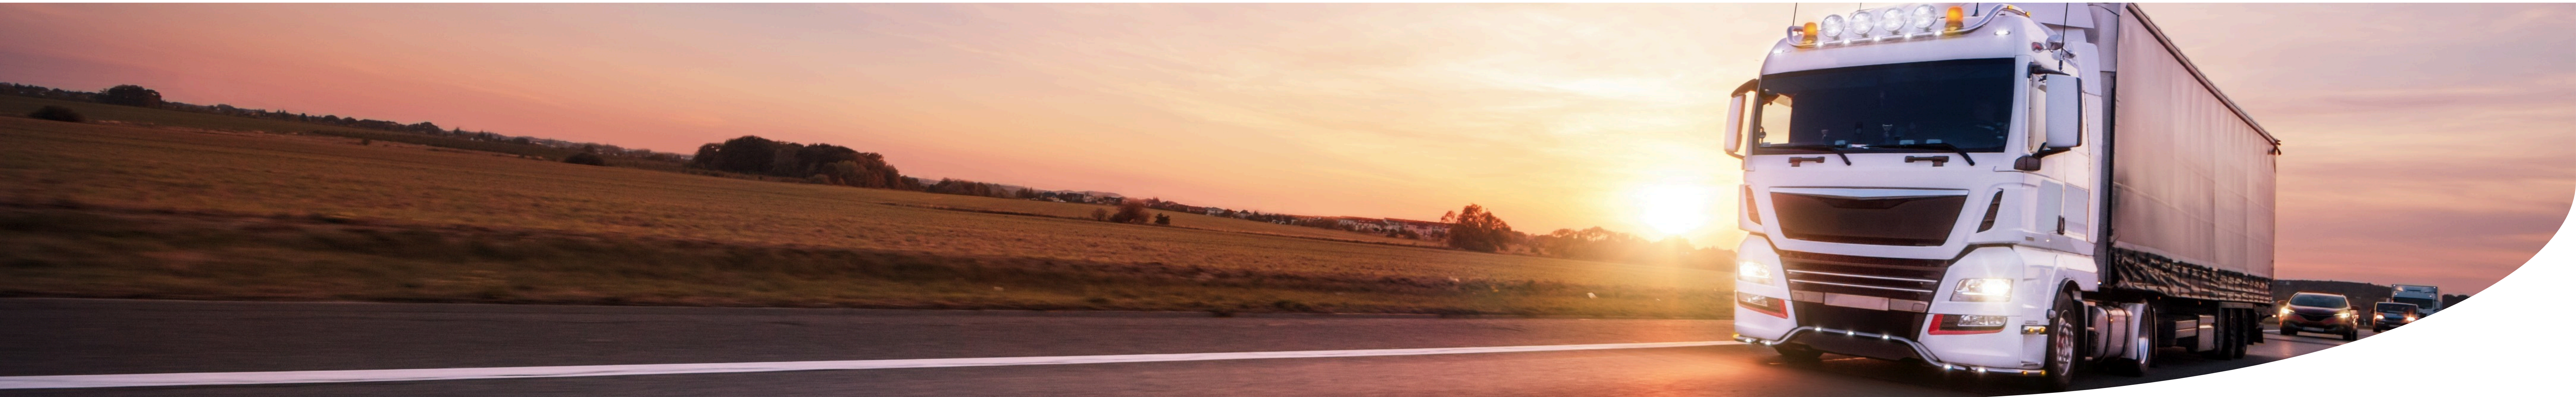



SIZE	LI/SS	PR	LOAD PER AXLE(kg)		SPEED SYMBOL (km/h)	IP (PSI)	OVERALL DIAMETER (mm)	OVERALL WIDTH (mm)	TREAD DEPTH (mm)	TREAD ARC WIDTH (mm)	RIM
			SINGLE	DUAL							
315/80R22.5	157/154K	20PR	4,000	3,550	K - 120 Km/H	120	1091	313	22	265	9.00

- Recommended
- Allowed

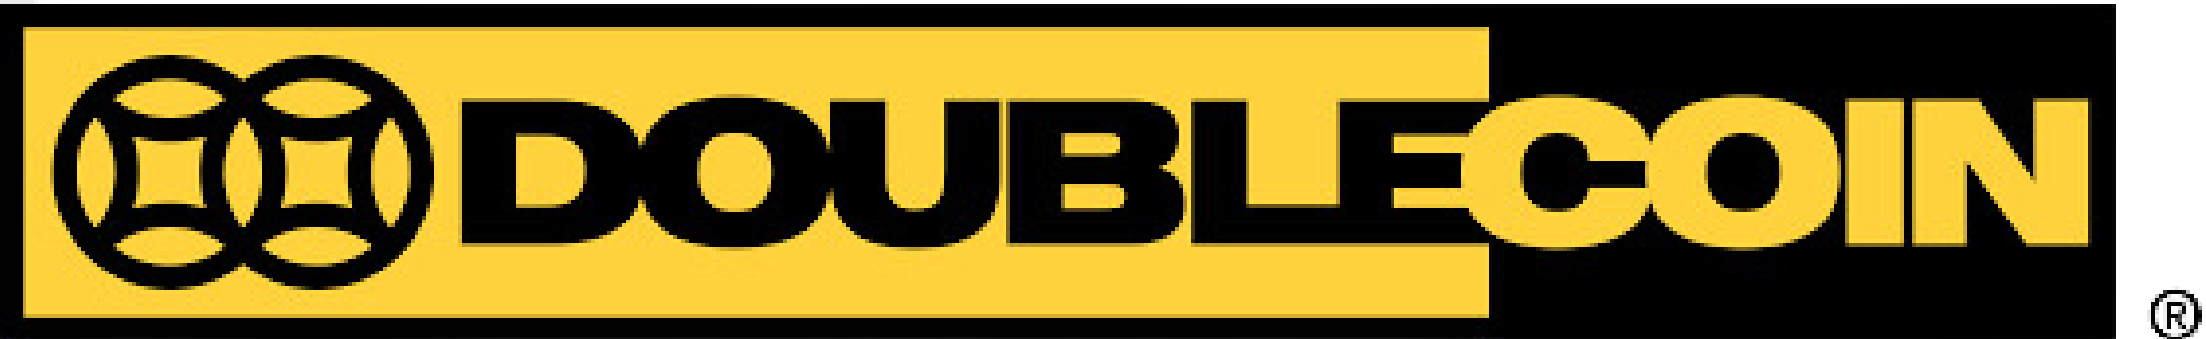

RLB210

Drive Axle

- Durable: Wide tread resists wear.
- Stable: Right-angle tread minimizes deformation.
- Strong: Reinforced carcass supports heavy loads.
- High Traction: Big block design enhances grip.

